

## SPEC SHEET

# Automatic Blister Packing Machines

**DPP-140, 250, 260 MODELS**

### INTRODUCTION

The DPP series Automatic Blister Packing Machines are suitable for capsule, tablet, honey pill, candy, liquid (ointment), syringe as well as irregular shape ALU-ALU, ALU-plastic or paper-plastic packing in pharmaceutical, healthcare, food, cosmetics, medical equipment industries etc.

**KEYWORDS** Blister packing | ALU-ALU | tablets | aluminum | blister packing | packaging | high speed



**DPP-140**



**DPP-250, 260**  
(with vibrating feeder)



**DPP-250, 260**  
(with universal brush feeder)

**ATTRIBUTES**

- Uses PLC, frequency converter, and man-machine interface
- Able to check 'on-line' and eliminate the waste plate independently.
- In accordance with GMP requirements. An ideal blister packing machine for aluminum-aluminum, aluminum-plastic and paper-plastic packing.

**TECHNICAL PARAMETERS**

Model	DPP-140	DPP-250	DPP-260
Cutting Frequency (times/min)	ALU-PVC: 10-50 ALU-ALU: 10-25	ALU-PVC: 6-50 ALU-ALU: 6-25	ALU-PVC: 6-70 ALU-ALU: 6-50
Adjustable Travel Range (mm) (Can be customized)	40-140	40-160	0-220
Max. Forming Area (mm)	140×130	240×150	240×150
Max. Forming Depth (mm)	26	26	26
Total Power	380V/220V 50Hz	380V/220V 50Hz	380V/220V 50Hz
Air Pressure (MPa)	0.4-0.6	0.4-0.6	0.4-0.6
Dimensions (mm)	2300×560×1410	3000×730×1600	3000×730×1600
Weight (kg)	750	1600	1600


## SPEC SHEET

# Automatic High Speed Blister Packing Machine

## DHP-260S MODEL

### INTRODUCTION

This machine is suitable for blister packing of capsules, tablets, chewing gums, candies and similar shapes of hardware, electronic components, medical instruments and food. It adopts flat pressure forming to form strong blisters, adopting roller type mesh sealing to ensure reliable sealing. The machine is equipped with a batching system, embossing device and horizontal boundless punching to achieve high production capacity and save significantly on packing material.

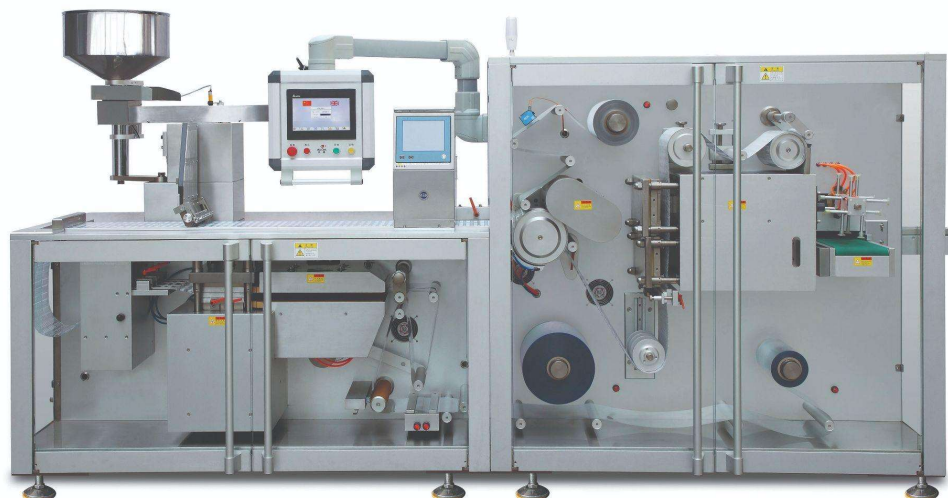

### TECHNICAL PARAMETERS

Model	DHP-260S
Max. Cutting Frequency(times/min)	150 (or 8.8m)
Max. Forming Depth (mm)	14
Max. Forming Area (mm)	180×250
Dimension (mm)	3550×1100×1950
Weight (kg)	2200
Total Power	24kw 380v/ 50Hz

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

### CONNECT WITH US

+86 577 6688 6278 | [info@capsulatech.com](mailto:info@capsulatech.com) | [www.captteksolutions.com](http://www.captteksolutions.com)